

**PRODUCT  
BROCHURE**  
EV Charger



# Contents

---

**04** WHO WE ARE  
*About Fox ESS*

**06** THE PRODUCTS  
*Quality matters / Global Markets*

**08** EV CHARGER  
*A7300 / A011K / A022K / AT022 / Charging Cable / Post*

**24** LOAD BALANCE  
SOLUTION

**25** SOLAR EV CHARGING  
SOLUTION

**27** EV BILLING

**28** TYPE 2 CHARGING SOCKET  
WITH SHUTTER

**29** PROJECT  
PICTURES



PLUG  
VERSION



SOCKET  
VERSION

# WHO WE ARE

---

Founded in 2019, Fox ESS is specialized in the R&D, production and sales of energy storage inverters, battery systems and EV charger, provides advanced distributed energy, energy storage products, smart energy management solutions and excellent electric vehicle charging solution for residential, industrial and commercial enterprises.






# RESEARCH & DEVELOPMENT

---

The core of Fox ESS is a number of advanced R&D centers located in Wenzhou, Shanghai, Wuxi and Wuhan. In these R&D centers, hundreds of engineers and technicians are tirelessly improving the products to ensure that Fox ESS photovoltaic inverter, energy storage system, EV charger and other products always keep the leading position.

The R&D team of Fox ESS is mainly composed of experts in inverter, energy storage and EV charger technology, including a variety of senior technical experts with rich experience in well-known enterprises of the industry.

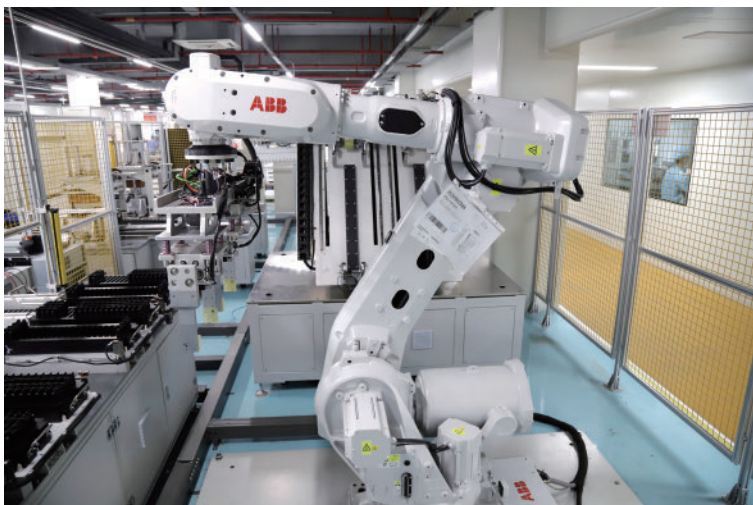

# THE PRODUCTS QUALITY IS PRICELESS

---

Fox ESS EV charger are precision engineered to provide high performance, efficiency, reliability; and we source our components from the leading manufacturers.

Fox ESS EV charger incorporate a unique production process and quality control to ensure product stability and long life.



# GLOBAL MARKETS

Fox Around The World



# EV CHARGER

---

- **A7300 SERIES**
- **A011K SERIES**
- **A022K SERIES**
- **AT022 SERIES**

Small, smart and simple to use

The Fox ESS EV charger is a versatile AC charger meant for homes, businesses, and charge point operators. It comes in 7kW 11kW and 22kW.

The Fox ESS EV charger creates smart charging systems that combine innovative technology with outstanding design.





# CERTIFICATION

Page 1 of 1

## CERTIFICATE of Conformity Radio Equipment Regulations 2017 (UK SI 2017 No. 1246)

**Registration No.:** AIV 50568403 0001  
**Report No.:** CN22Z9MF 001

**Holder:** FOXESS CO., LTD.  
No.605, Jinhai Third Road,  
New Airport Industry Area, Longwan District,  
Wenzhou,  
325025 Zhejiang  
P.R. China

**Product:** EV charging station (AC charger)

**Test standard:** ETSI EN 300 328 V2.2.2.2019  
ETSI EN 300 330 V2.1.1.2017  
ETSI EN 301 488-1 V2.2.2.2019  
ETSI EN 301 488-3 V2.1.1.2019  
ETSI EN 301 488-17 V3.2.4.2020  
EN IEC 62311-2020  
EN IEC 61851-2:12:2021  
EN IEC 61000-6-1:2019  
EN IEC 61000-6-2:2019  
EN IEC 61000-6-3:2021  
EN IEC 61000-6-4:2019  
BS EN IEC 61851-1:2019

**Identification:** A730071-E-1-R A730051-E-1-B A730071-E-1-S  
A730051-E-1-R A730051-E-1-B A730051-E-1-S

This certificate of conformity is based on an evaluation of a sample of the above mentioned product, technical report and documentation. This certificate does not imply the assessment of the production of the product and does not permit the use of a TÜV Rheinland mark of conformity.

**Date:** 2023-01-10

**Certification Body**  
G. Yin




**UK CR** THE UKCA mark may be used, in addition to UK Legislation and the UK Declaration of Conformity, has been completed. **UK CR**

**TÜV Rheinland UK Ltd.**  
Fränk. Gasse (Frankfurt) 101 | Bismarckstr. 30a, 90461, 90461

 **TÜV Rheinland®**  
Precisely Right.

www.tuv.com

## CERTIFICATE of Conformity EC Council Directive 2014/53/EU of Radio Equipment



**Registration No.:** AT 50588755 0001  
**Report No.:** CN23JPLX 001

**Holder:** FOXESS CO., LTD.  
No.605, Jinhai Third Road,  
New Airport Industry Area, Longwan District,  
Wenzhou,  
325025 Zhejiang  
P.R. China

**Product:** Radio Equipment  
(AC charger)

**Identification:** A022801-E-2 A022801-E-2 A011831-E-1 A011831-E-2  
Serial No.: Equipment Key ID  
Remark: 1. See Declaration of Conformity CN23JPLX 001 for details.  
2. See more standards on page 0000.

**Tested acc. to:** ETSI EN 301 488-1 V2.2.2.2019  
ETSI EN 301 488-3 V2.2.2.2019  
ETSI EN 301 488-17 V3.2.4.2020  
ETSI EN 301 511 V2.1.1.2021  
ETSI EN 301 511 V2.1.1.2021  
ETSI EN 301 511 V2.1.1.2021  
EN IEC 61851-2:12:2021

This certificate of conformity is based on an evaluation of a sample of the above mentioned product. This is to verify that the tested sample is in conformity with all provisions of Article 3 of Council Directive 2014/53/EU. This certificate does not imply assessment of the production and does not permit the use of a TÜV Rheinland mark of conformity. The holder of the certificate is authorized to use this certificate as part of the technical documentation and in combination with the EC Declaration of Conformity.

**Date:** 07.09.2023

**Certification Body**  
Shawn Peng



**TÜV Rheinland LGA Products GmbH - Tillystraße 2 - 90431 Nürnberg**  
Frankfurt 49-231 (886-1371) Fax: +49-231 8900-3935 e-mail: cert@lga.tuv.com see http://www.tuv.com/safety

**CE** The CE marking may only be used if all relevant and effective EC Directives are complied with. **CE**



# A7300 SERIES

7.3kW

- Power: 7.3kW
- Output Current: Max.32A
- Output Voltage: 230V AC
- Type 2 cable charging connector
- Compliant with OCPP 1.6 (JSON)/2.0
- App operation or RFID authentication or plug, play & 4G
- Protection Grade: IP55
- -30 ~ 50°C wide Operating Temperature
- Warranty time: 3 years



PV ENERGY  
DIRECTING



A4 SIZE  
DESIGN




SMART  
CONTROL



FLEXIBLE  
INSTALLATION



SECURE  
AND SAFE

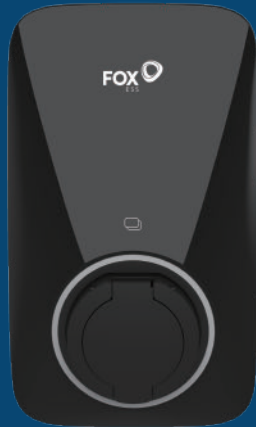

# A7300 SERIES

## TECHNICAL SPECIFICATIONS

7.3kW

MODEL	A7300P1-E	A7300S1-E
TYPE	CHARGING PLUG	CHARGING SOCKET
<b>INPUT</b>		
Wiring Scheme	1P+N+PE	
Voltage	230Vac, ±20%	
Maximum Current	32A	
Frequency	50/60Hz	
<b>OUTPUT</b>		
Voltage	230Vac, ±20%	
Maximum Current	32A	
Rated Power	7.3kW	
<b>USER INTERFACE &amp; CONTROL</b>		
Connector Type	Type 2 cable	Type 2 socket
RFID Reader	Mifare ISO/IEC 14443 A	
Start Mode	Plug&Play/RFID card/App	
<b>COMMUNICATION</b>		
WiFi, Bluetooth	Yes	
4G	Optional (coming soon)	
OCPP	OCPP 1.6 JSON, OCPP 2.0 optional (coming soon)	
<b>ENVIRONMENT</b>		
Installation	Wall-mount / Post-mount	
Operating Temperature	-30°C ~ 50°C	
Operating Humidity	5% ~ 95% No condensation	
Operating Altitude	≤2000m	
<b>DIMENSION AND WEIGHT</b>		
Product Dimension	320*190*130 mm	320*190*144.5 mm
Product Weight	3.55kg	2.0kg
<b>SAFETY</b>		
IP protection rating	IP55	
IK protection rating	IK08	
Residual Current Detection	AC 30mA / DC 6mA	
Electrical Protection	Over current protection, Residual current protection, Ground protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over/Under temperature protection	
EMC	Class B	
Certification	CE	
Certification Standard	EN/IEC 61851-1: 2019, EN/IEC 61851-21-2: 2021	



# A011K SERIES

11kW

- Power: 11kW
- Output Current: Max.16A
- Output Voltage: 400V AC
- Type 2 cable charging connector
- Compliant with OCPP 1.6 (JSON)/2.0
- App operation or RFID authentication or plug, play & 4G
- Protection Grade: IP55
- -30 ~ 50 °C wide Operating Temperature
- Warranty time: 3 years



PV ENERGY  
DIRECTING



A4 SIZE  
DESIGN




SMART  
CONTROL



FLEXIBLE  
INSTALLATION



SECURE  
AND SAFE

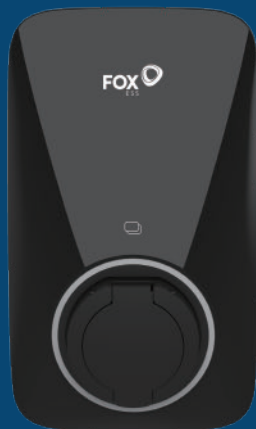

# A011K SERIES

TECHNICAL  
SPECIFICATIONS

11kW

MODEL	A011KP1-E-2	A011KS1-E-2
TYPE	CHARGING PLUG	CHARGING SOCKET
<b>INPUT</b>		
Wiring Scheme	3P+N+PE	
Voltage	400Vac, ±20%	
Maximum Current	16A	
Frequency	50/60Hz	
<b>OUTPUT</b>		
Voltage	400Vac, ±20%	
Maximum Current	16A	
Rated Power	11kW	
<b>USER INTERFACE &amp; CONTROL</b>		
Connector Type	Type 2 cable	Type 2 socket
RFID Reader	Mifare ISO/IEC 14443 A	
Start Mode	Plug&Play/RFID card/App	
<b>COMMUNICATION</b>		
WiFi, Bluetooth	Yes	
4G	Optional	
OCPP	OCPP 1.6 JSON, OCPP 2.0 optional	
<b>ENVIRONMENT</b>		
Installation	Wall-mount / Post-mount	
Operating Temperature	-30°C ~ 50°C	
Operating Humidity	5% ~ 95% No condensation	
Operating Altitude	≤2000m	
<b>DIMENSION AND WEIGHT</b>		
Product Dimension	320*190*130 mm	320*190*144.5 mm
Product Weight	3.55kg	2.0kg
<b>SAFETY</b>		
IP protection rating	IP55	
IK protection rating	IK08	
Residual Current Detection	AC 30mA/DC 6mA	
Electrical Protection	Over current protection, Residual current protection, Ground protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over/Under temperature protection	
EMC	Class B	
Certification	CE	
Certification Standard	EN/IEC 61851-1: 2019, EN/IEC 61851-21-2: 2021	



# A022K SERIES

22kW

- Power: 22kW
- Output Current: Max.32A
- Output Voltage: 400V AC
- Type 2 cable charging connector
- Compliant with OCPP 1.6 (JSON)/2.0
- App operation or RFID authentication or plug, play & 4G
- Protection Grade: IP55
- -30 ~ 50 °C wide Operating Temperature
- Warranty time: 3 years



PV ENERGY  
DIRECTING



A4 SIZE  
DESIGN




SMART  
CONTROL



FLEXIBLE  
INSTALLATION



SECURE  
AND SAFE

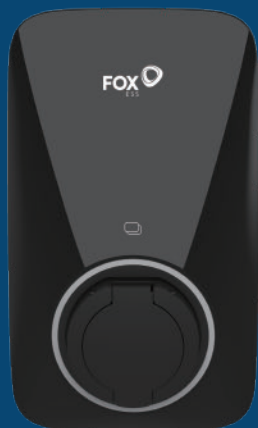

# A022K SERIES

## TECHNICAL SPECIFICATIONS

22kW

MODEL	A022KP1-E-2	A022KS1-E-2
TYPE	CHARGING PLUG	CHARGING SOCKET
<b>INPUT</b>		
Wiring Scheme	3P+N+PE	
Voltage	400Vac, ±20%	
Maximum Current	32A	
Frequency	50/60Hz	
<b>OUTPUT</b>		
Voltage	400Vac, ±20%	
Maximum Current	32A	
Rated Power	22kW	
<b>USER INTERFACE &amp; CONTROL</b>		
Connector Type	Type 2 cable	Type 2 socket
RFID Reader	Mifare ISO/IEC 14443 A	
Start Mode	Plug&Play/RFID card/App	
<b>COMMUNICATION</b>		
WiFi, Bluetooth	Yes	
4G	Optional	
OCPP	OCPP 1.6 JSON, OCPP 2.0 optional	
<b>ENVIRONMENT</b>		
Installation	Wall-mount / Post-mount	
Operating Temperature	-30°C ~ 50°C	
Operating Humidity	5% ~ 95% No condensation	
Operating Altitude	≤2000m	
<b>DIMENSION AND WEIGHT</b>		
Product Dimension	320*190*130 mm	320*190*144.5 mm
Product Weight	3.55kg	2.0kg
<b>SAFETY</b>		
IP protection rating	IP55	
IK protection rating	IK08	
Residual Current Detection	AC 30mA/DC 6mA	
Electrical Protection	Over current protection, Residual current protection, Ground protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over/Under temperature protection	
EMC	Class B	
Certification	CE	
Certification Standard	EN/IEC 61851-1: 2019, EN/IEC 61851-21-2: 2021	



Dual output design  
Space saving, dual charging

## AT022 SERIES

22kW

- Power: 22kW or 11kW\*2
- Output Current: Max.32A or 16A\*2
- Output Voltage: 400V AC
- Type 2 cable charging connector
- Compliant with OCPP 1.6 (JSON)/2.0
- App operation or RFID authentication or plug, play & 4G
- Protection Grade: IP55
- -30 ~ 50°C wide Operating Temperature
- Warranty time: 3 years



PV ENERGY  
DIRECTING



SINGLE & DOUBLE  
COMPATIBLE DESIGN



SMART  
CONTROL



FLEXIBLE  
INSTALLATION



SECURE  
AND SAFE





# AT022 SERIES

TECHNICAL  
SPECIFICATIONS

22kW

MODEL	AT022-DP	AT022-DS
TYPE	CHARGING PLUG	CHARGING SOCKET
<b>INPUT</b>		
Wiring Scheme	3P+N+PE	
Voltage	400Vac, ±20%	
Maximum Current	32A	
Frequency	50/60Hz	
<b>OUTPUT</b>		
Voltage	400Vac, ±20%	
Maximum Current	32A or 16A	
Rated Power	22kW or 11kW*2	
<b>USER INTERFACE &amp; CONTROL</b>		
Connector Type	Type 2 cable	Type 2 socket
RFID Reader	Mifare ISO/IEC 14443 A	
Start Mode	Plug&Play/RFID card/App	
<b>COMMUNICATION</b>		
WiFi, Bluetooth	Yes	
4G, Ethernet	Optional	
OCPP	OCPP 1.6 JSON, OCPP 2.0 optional	
<b>ENVIRONMENT</b>		
Installation	Wall-mount / Post-mount	
Operating Temperature	-30°C ~ 50°C	
Operating Humidity	5% ~ 95% No condensation	
Operating Altitude	≤2000m	
<b>DIMENSION AND WEIGHT</b>		
Product Dimension	500*350*155 mm	
Product Weight	18kg	14kg
<b>SAFETY</b>		
IP protection rating	IP55	
IK protection rating	IK08	
Residual Current Detection	AC 30mA/DC 6mA	
Electrical Protection	Over current protection, Residual current protection, Ground protection, Surge protection, Over/Under voltage protection, Over/Under frequency protection, Over/Under temperature protection	
EMC	Class B	
Certification	CE	
Certification Standard	EN/IEC 61851-1: 2019, EN/IEC 61851-21-2: 2021	

# AC TYPE2 CHARGING CABLE

---

European Standard AC Type2 Double Connectors Charging Cable is a reliable connection device used between electric vehicles and EV charger.

High strength ABS material, which has better quality and can be used for longer; IP55 waterproof could be safer during charging.

Thanks to the Silver plating on the standard J1772 inlet, our charger have better conductivity and could prevent overheating.





# AC TYPE2 CHARGING CABLE

## TECHNICAL SPECIFICATIONS

TYPE	MEAC-S-032A	MEAC-T-032A
<b>CABLE</b>		
Cable type	3 x 6 mm <sup>2</sup> + 1 x 0.75 mm <sup>2</sup>	5 x 6 mm <sup>2</sup> + 1 x 0.75 mm <sup>2</sup>
Cable length	5.0 m	
<b>ELECTRICAL PARAMETERS</b>		
Rated Voltage	250V	480V
Rated Current	32A	
Insulation resistance	≥100MΩ 500V DC	
Withstand voltage	L、 N and PE >2500V AC L and N >2500V AC	
<b>MECHANICAL PARAMETERS</b>		
Mated cycles	≥10000	
Mated force	<100N	
<b>ENVIRONMENTAL PARAMETERS</b>		
Operate Temperature	-30°C ~ 55°C	
Ingress Protection	IP54	
Flame Rating	UL94-V0	
<b>STANDARD</b>		
Certification	CE/TUV	



# POST OF EV CHARGER

- Base: 200\*150 mm
- Main part: 60\*120\*1200 mm



THICKENED  
MATERIAL



WATERPROOF  
AND  
RUST-PROOF



SIMPLE  
INSTALLATION



ROBUST  
AND  
DURABLE



# EXTREMELY EASY TO INSTALL

---

The installation process is fast and easy. We design the EV charger for easy installation, which can be completed in a few simple steps.

# MANAGEMENT SYSTEM



The management system is designed for operators to manage the EV charger and the charging service to all users.

The future of charging is smart, and our management system is equipped with future-proof features.

The system works on the cloud, which enables us to update new features rapidly.

# FoxSwitch APP

01

Control your charger with FoxSwitch app, Find the FoxSwitch APP on the Apple APP & Google Play stores.




02

Start or stop charging, Monitor the status of your charger and control it remotely on the go, View your statistics in real time.




03

Schedule charging when the power is cheapest, Lock your charger to protect it from unwanted use.

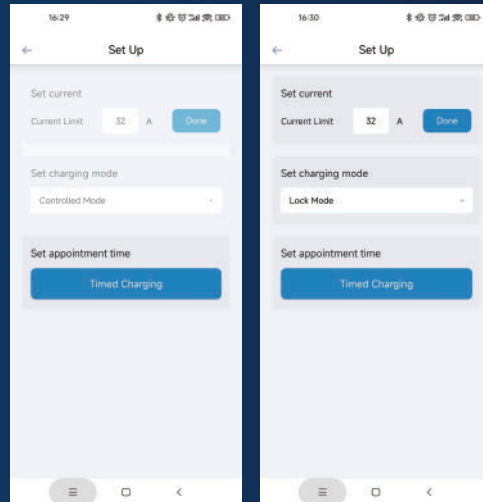

04

Update firmware remotely Query fault and charging order.

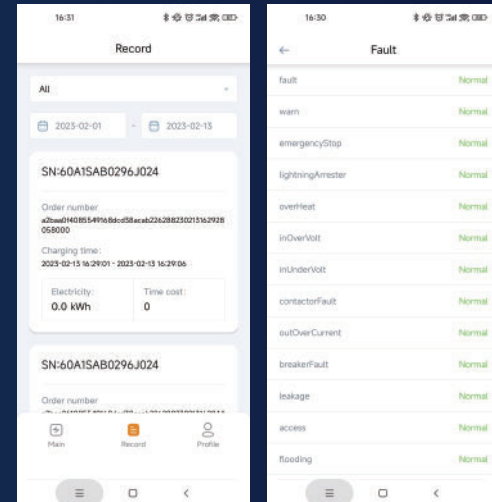

# STANDARD WITH EVC AND HYBRID INVERTER

There are three Work Modes designed for the Smart EV Charger:


**Eco Mode:** use the power from PV + Battery + Grid. Grid current no more than 6A.

**Green Mode:** use the power from PV + Battery only

**Fast Mode:** charge with EV car max. power.

Note:

- \* Storage inverter under self-use mode with no limit of grid exporting power
- \* Power support priority: home load → EV Charger → Battery
- \* EV Charger Min. charge current 6A

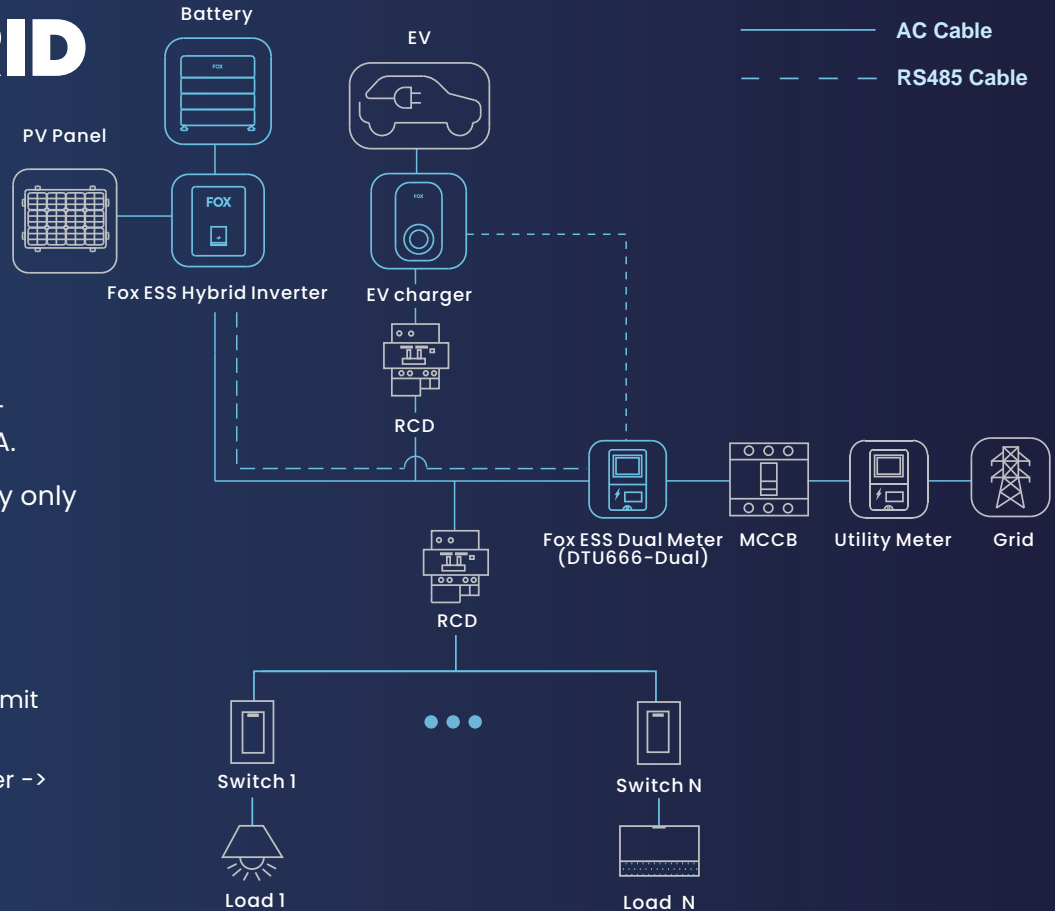



# EV CHARGER AFTER-INSTALLED

There are three Work Modes designed for the Smart EV Charger:


**Eco Mode:** use the power from PV + Battery + Grid. Grid current no more than 6A.

**Green Mode:** use the power from PV + Battery only

**Fast Mode:** charge with EV car max. power.

Note:

- \* Storage inverter under self-use mode with no limit of grid exporting power
- \* Power support priority: home load -> EV Charger -> Battery
- \* EV Charger Min. charge current 6A

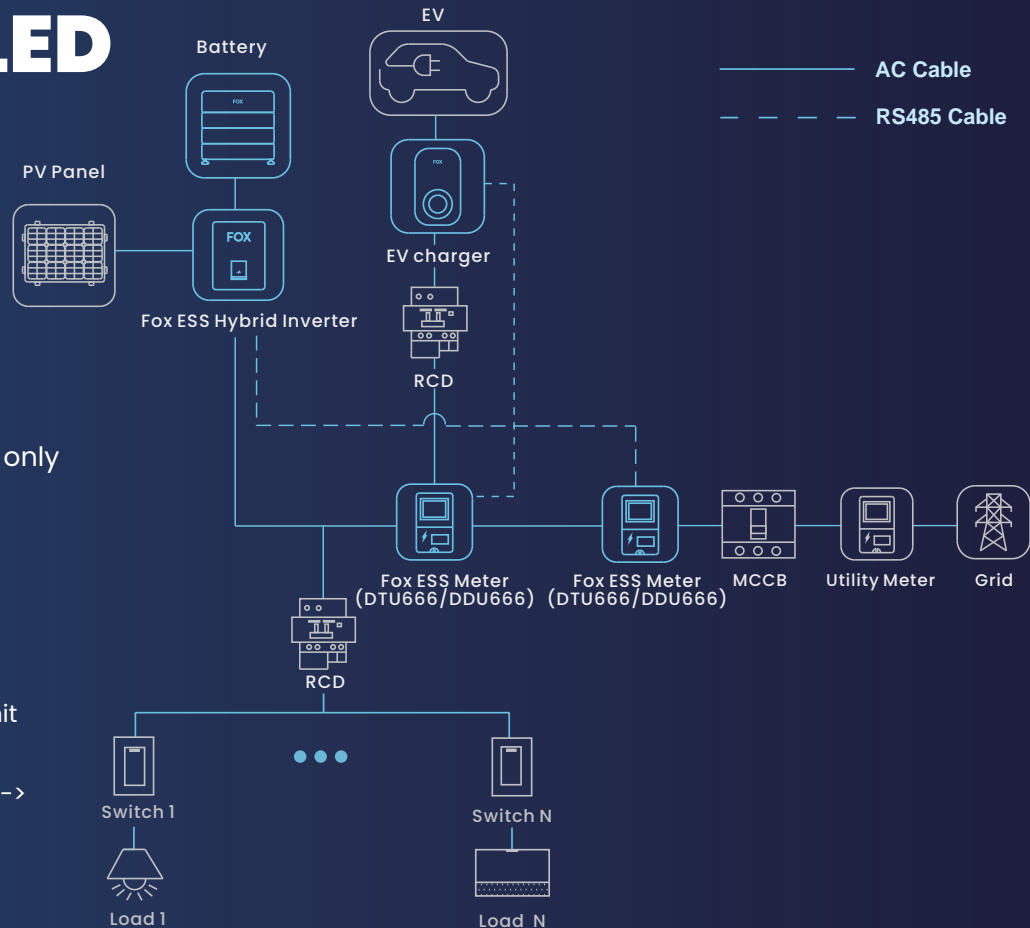

# FOX ESS HYBRID INVERTER & OTHER BRAND PV INVERTER

There are three Work Modes designed for the Smart EV Charger:


**Eco Mode:** use the power from PV + Battery + Grid. Grid current no more than 6A.

**Green Mode:** use the power from PV + Battery only

**Fast Mode:** charge with EV car max. power.


Note:

- \* Storage inverter under self-use mode with no limit of grid exporting power
- \* Power support priority: home load → EV Charger → Battery
- \* EV Charger Min. charge current 6A

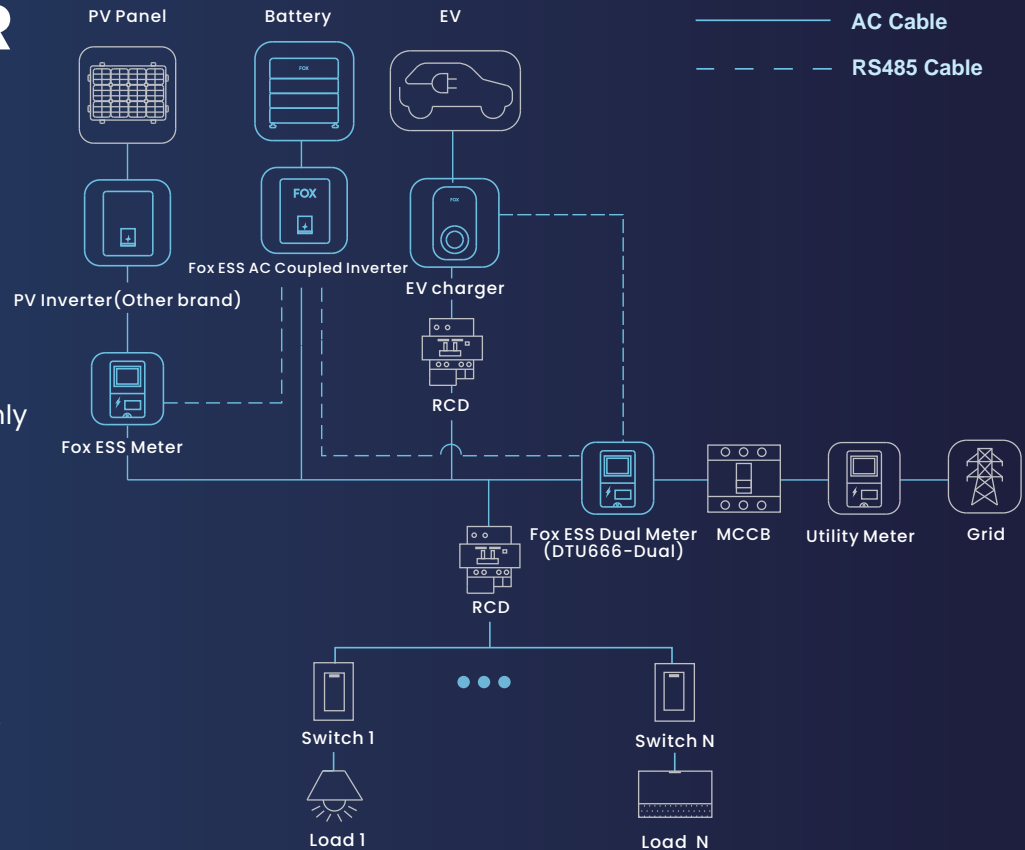

# EV BILLING

Our scalable EV charging billing system has been designed specifically for EV charging networks to address every aspect of your billing operations.

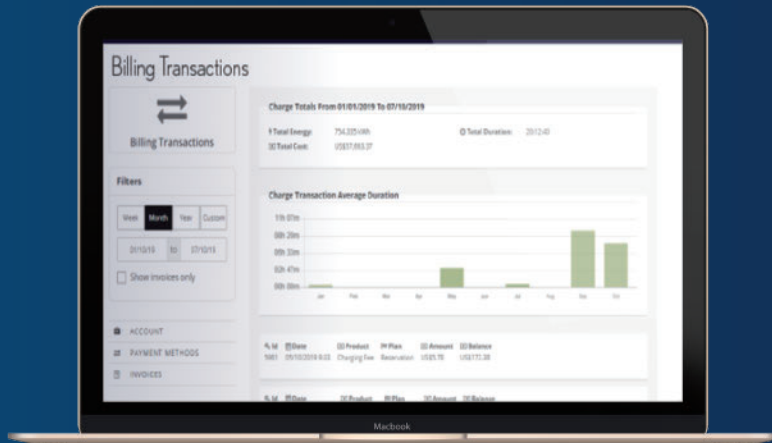

- Multiple EV billing tariffs and plans are supported, including pre-paid, post-paid, etc.
- Real-time rating
- Dynamic and static cost factoring
- Supports extensive business models, including OEM, Host, etc.
- Allows complex reconciliation between partners in the ecosystem
- Support for multiple currencies
- Flexible tax management
- Integration with multiple payment gateways
- Reporting and dashboards

# TYPE 2 CHARGING SOCKET WITH SHUTTER

---

Type 2 Charging Socket With Shutter Is Based On The Proven Charging Socket Type 2 With An Additional Shutter Module, With Additional Protection Against Contact Of Electrical Parts.



# FOX ESS PROJECT PICTURES



Germany





Jinan, China



Wenzhou, China



Site Picture





Site Picture



Site Picture

# CUSTOMIZED SOLUTION


---



AAA



BBB

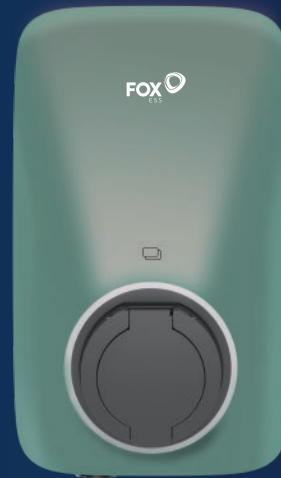

CCC



DDD



 FOXESS CO., LTD.

 No.939, Jinhai Third Road, New Airport Industry Area, Longwan District, Wenzhou, Zhejiang, China

 [www.fox-ess.com](http://www.fox-ess.com)

 [ev@fox-ess.com](mailto:ev@fox-ess.com)

---